





## TELE-VIEW® TV-200V Wireless Digital Video Otoscope

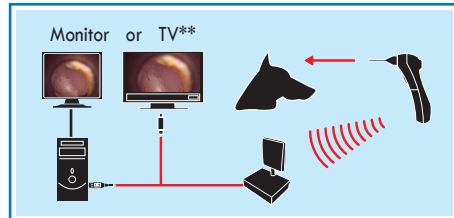

Wireless Transmission to any TV or Computer



Capture Images and Store in Patient Record

**New Models  
More Features  
Lower Prices!**


### Features:

- » Detailed, high resolution images
- » Focus, zoom and brightness adjustment
- » View on any TV or computer
- » Working channel for foreign body removal
- » Easy image capture and storage to patient records


### Benefits:

- » Improves client education and compliance
- » Increases revenue by verifying necessity of procedure
- » Easier for practitioner to see pathology
- » Safer viewing for practitioner - keeps face away from teeth
- » Also great for viewing nasal cavity, teeth, gums and skin

## TELE-VIEW® TV-200X Wired Digital Video Otoscope

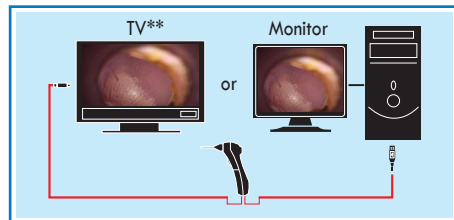

Connects Directly to any TV or Computer



Capture Images and Store in Patient Record

Top View of Working Channel With Flexible Forceps\*



The Tele-View® TV-200V Wireless Otoscope and The Tele-View TV-200X Wired Otoscope easily magnify and display patient pathology on any TV or computer. Improve client education and compliance by enlarging and presenting problems to clients in real-time. As 'Seeing is Believing,' the TV-200V & TV-200X will generate incremental revenue and profits by increasing the number of procedures performed in the clinic.

\* 1.8 mm Flexible Forceps Not Included \*\*TV and Computer Not Included - Actual Images from Otoscope

TELE-VIEW® TV-200V & TV-200X  
**Wireless & Wired Digital Video Oscopes**

**Product Configurations:**

**TV-200V** Wireless Model works with TV or Computer

**TV-200X** Wired Model works with TV or Computer

**Wireless and Wired Oscope Specifications:**

**TV Output:** NTSC/PAL

**Computer Output:** USB

**Memory:** 1 GB micro SD memory storage

**Oscope Dimensions:** L: 6.7 in (170 mm) x W: 1.6 in (40 mm) x H: 2.8 in (70 mm)

**Oscope Weight with Battery:** 6 oz (170 g)

**Oscope Power:** 1 User-Replaceable Li-Ion Battery (3.6V/800 mAh)

**Specula Dimensions:** 0.1 in (3 mm) x 2.5 in (63 mm)  
 (inner diameter x length) 0.2 in (4 mm) x 2.5 in (63 mm)  
 0.2 in (4 mm) x 2.5 in (63 mm) with working channel  
 0.3 in (7 mm) x 2.8 in (73 mm)  
 0.3 in (7 mm) x 2.8 in (73 mm) with working channel

**Working Channel Diameter:** 2.0 mm (fits 1.8 mm flexible forceps-not included)

**Magnification:** 20 ~ 200x (range varies according to monitor size)

**Focus Range:** 1.2 in (30 mm) ~ 20 ft (6 m)

**Resolution:** 1600 x 1200 pixels / 720 x 480 pixels

**Focus Type:** Manual Focus

**Illumination Source:** 5 White LEDs

**Brightness:** 7 Levels

**System Requirements:** TV- composite video input  
 Computer- Windows XP, Vista, 7, or Server 2000  
 (Server 2000 only compatible with TV-200V)  
 Computer- Mac with Video Capture Card

**Warranty:** 1 year

**Wireless Only Specifications:**

**Transmitting Power:** <10 dBm

**Transmission Frequency:** 2.4 Ghz

**Transmission Distance:** 33 ft (10 m)

**Wireless Channels:** 4 (1,2,3,4)

**Receiver Power Supply:** DC 5V / 1000 mA with 110/220V, 50Hz AC Adaptor


**Receiver Dimensions:** L: 4.6 in (118 mm) x W: 4 in (103 mm) x H: 1.3 in (33 mm)

**Receiver Weight:** 9 oz (255 g)


*"The Tele-View Wireless Oscope has made me much more confident in ear diagnosis and treatment. I can now see even the smallest details on the ear drum much better than when I was a young practitioner with perfect eyesight! When coupled with an inexpensive monitor, clients can see the ear problems and it's an easy next step to generate additional treatment revenue. Thank you for this new tool for the profession!"*

-Miranda Alexander, DVM - Balboa Vet Clinic, San Diego, CA


**Included Components**




Wireless or Wired Video Oscope



Wireless Receiver  
\*For TV-200V Only




Software Drivers & Cables



5 Specula



Wired Transmission



Wireless Transmission\*

\*Simulated Picture